

ASSA ABLOY

ASSA ABLOY Entrance Systems Ltd
 Industrial Door and Docking Solutions
 7 Churchill Way .35A Business Park
 Chapelton Sheffield UK S35 2PY

Tel: +44 (0)114 257 4330
 Fax: +44 (0)114 257 4399

Contractors Notes:

Contractor to provide a flush fixing face for installation of the door. Jamb and lintel to be flush, plumb in the same plane & clear of projections. Also please take into account all head & side room clearances required to accommodate the door. We remind you that its the clients responsibility to ensure the structure is suitable to accept the weight of the door, components & fixings. If in doubt please engage the services of a structural engineer. Approx Door Weight: **35kg's m²**

Single Phase Electrical Requirements


The client must provide a 240 Volt single phase supply c/w fused spur with 3 pin plug socket within 1 mtr of the opening on the motor side.

Qty: * Nr As Drawn Ref: .


Operation: Tube Mtr Type: Non Insulated

Coil: Rev Std Rail: 'L' 'T'


Guides & Angles:

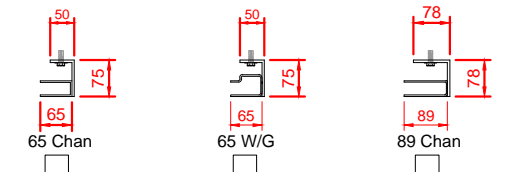


Finish: Powder Coat . Galvanised
 Plast Ext Face .

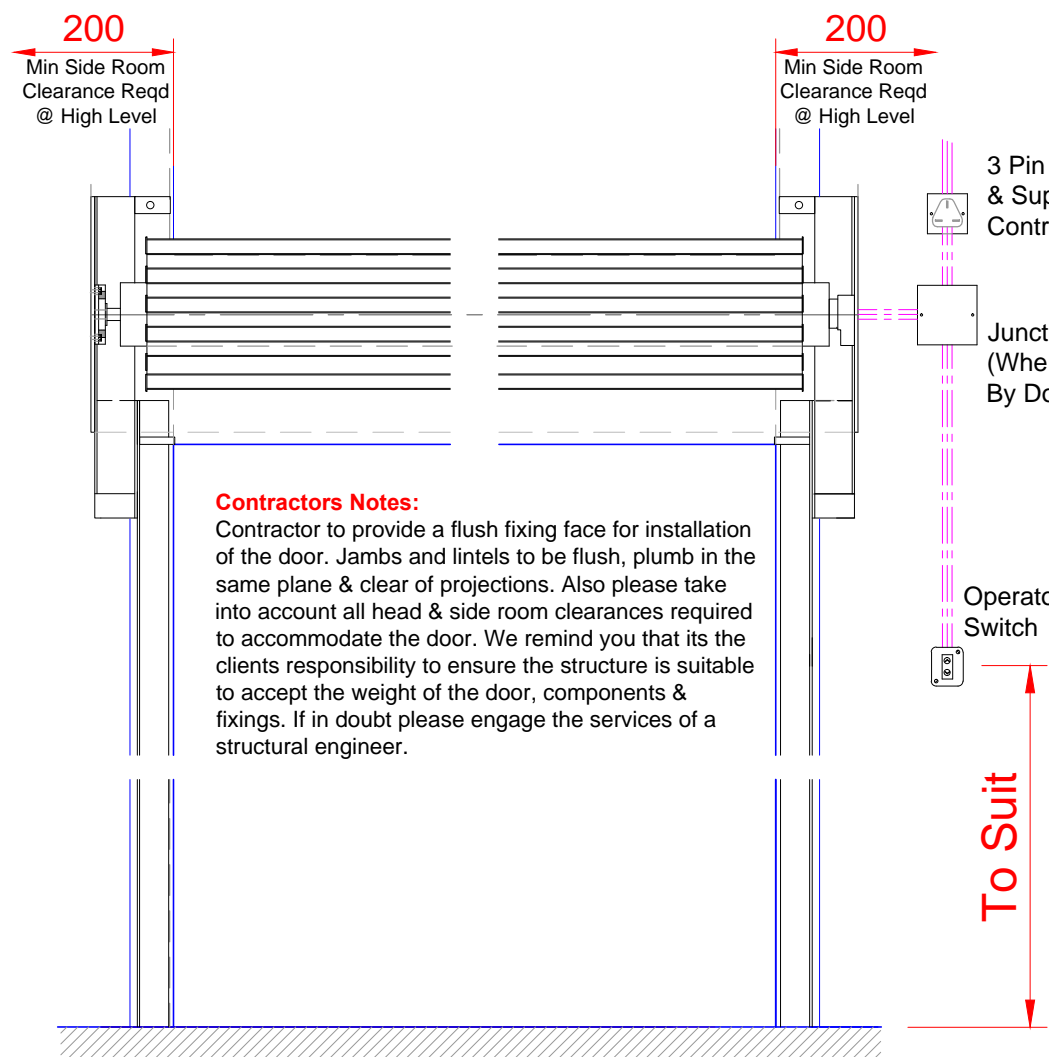

ELEVATION

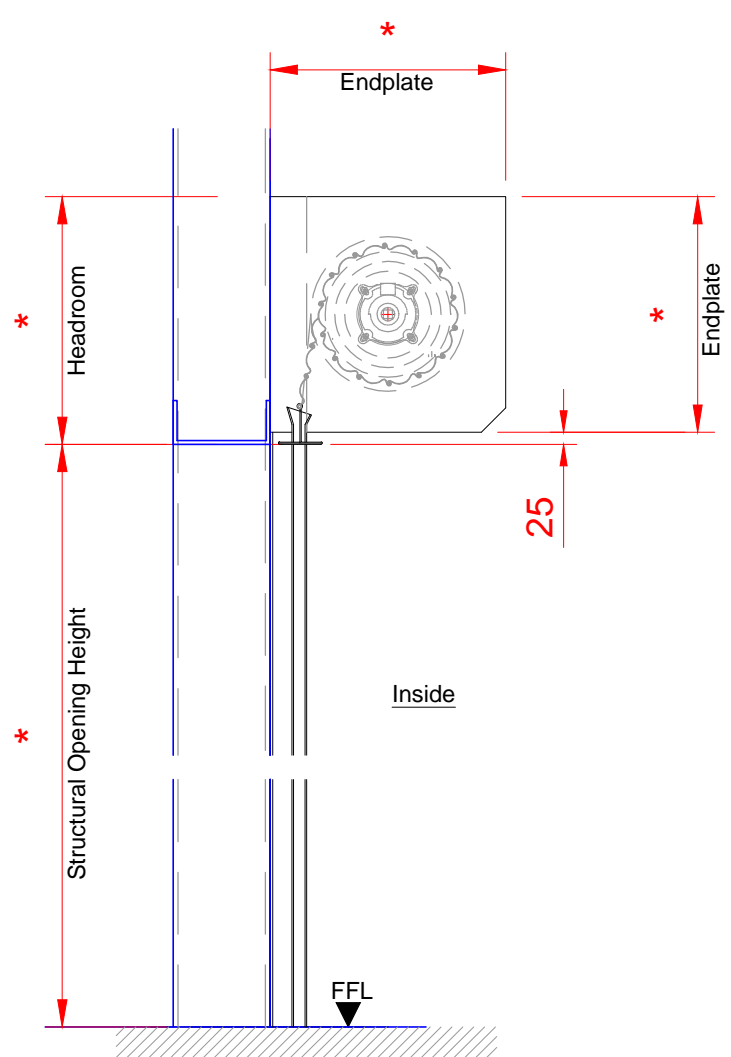

SECTION

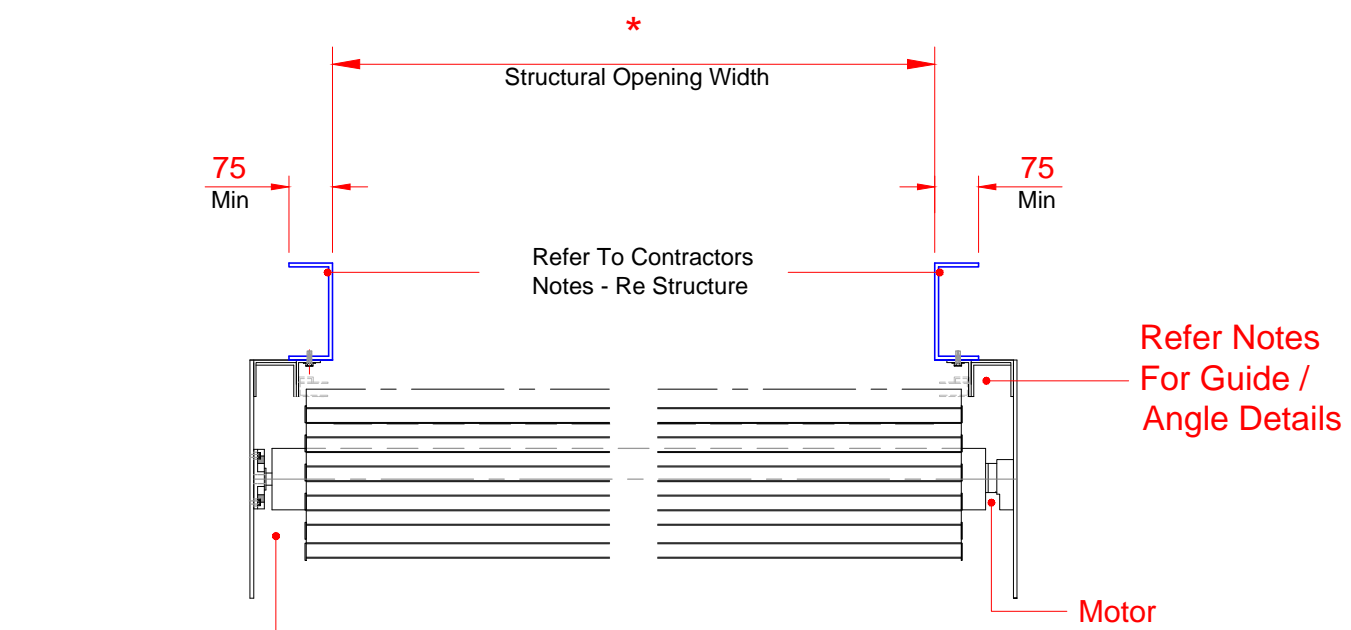

Inside
 PLAN

Rev	Description	Date
- -	- -	-

Drawn		DO NOT SCALE!
Date		
Chk'd		Date
Drg No.		Rev