


Higher level cross member required with min 200mm face where the opening width is over 3000mm or where the operator is mounted centrally.

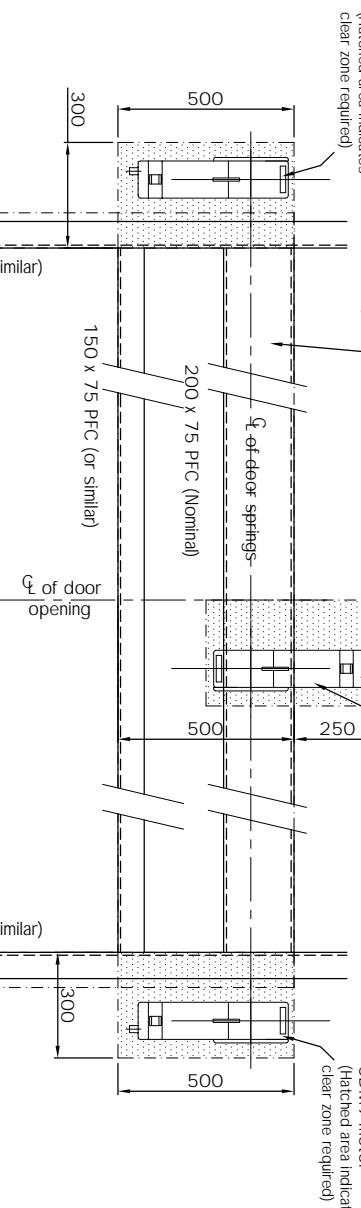

All steelwork to be by others in conjunction with the structural engineers design, calculations and specification.

Note: All steel must have the internal fixing faces set flush in the same plane and be clear from projections, such as bolt heads.


Vertical posts to have a minimum 75mm free fixing face

All base plates must be kept clear of the internal face of the posts.

All secondary steelwork including mounting plates and suitable mounting surfaces for control equipment must be provided by others in line with our installation requirements.

Delete motor & control panel as appropriate


INTERNAL VIEW OF DOOR OPENING
(Door tracks omitted for clarity)

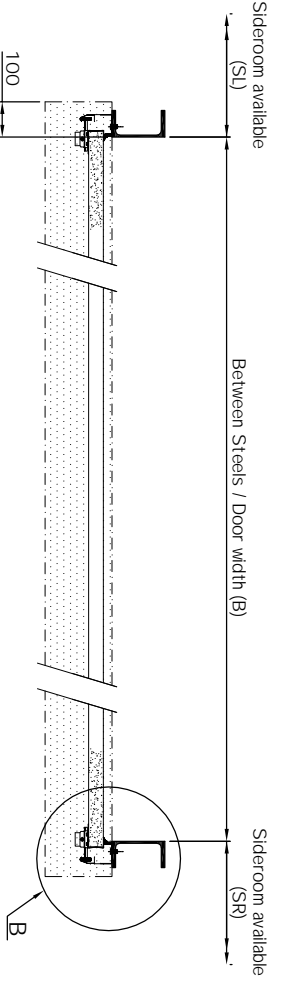

LOW LEVEL PLAN DETAIL 'A-A'

Note:- Minimum clearance required to each side except where a lock interlock is required, then 150mm will apply at control panel side, also differs at operator location see elevation.

© COPYRIGHT AAES

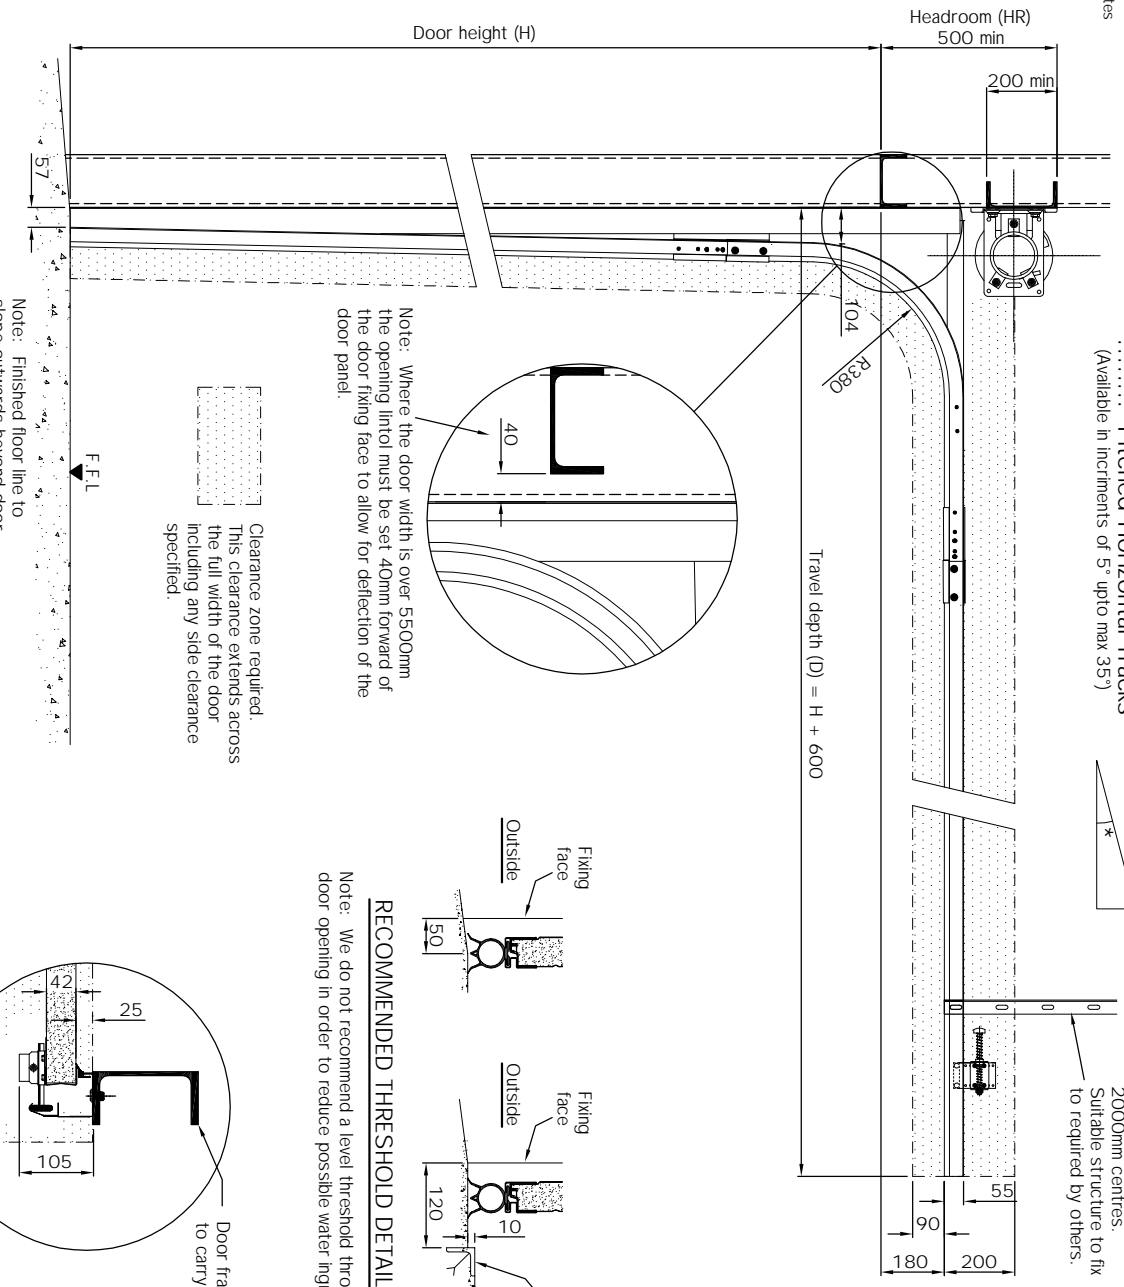

* PITCHED HORIZONTAL TRACKS
(Available in increments of 5° upto max 35°)

Std. track hangers 2000mm long max by Assa Aablooy at max 2000mm centres. Suitable structure to fix to required by others.

Pos.	Qty.	B	H	HR	D	SL	SR

TOLERANCES +/- 3mm (DO NOT SCALE - if in doubt ask)

ASSA ABLLOY

ASSA ABLLOY Entrance Systems Ltd
Industrial Door and Docking Solutions

7 Churchill Way .35A Business Park .Chapelton .Sheffield .UK .S35 2PY
Tel: +44 (0)114 257 4330 Fax: +44 (0)114 257 4399

TITLE: Setting out details for electric operated sectional overhead door with standard lift hardware fitting to steelwork.

CLIENT:

DRAWING STATUS

PRELIMINARY

FOR APPROVAL

CONSTRUCTION

AS BUILT

REV. BY DATE COMMENT

SPECIFICATION

DOOR TYPE: OH1042FG P F

OPERATION: CDM9 Motor

CONTROL PANEL:

920 Panel (205x150x75 - Impulse up, deadman down)

930 Panel (205x150x75 - Impulse up & down, safety edge)

950 Panel (360x150x120 - Impulse up & down, safety edge)

OPTIONS (930 / 950 panel only)

Automatic closing (930 / 950 panel)

Reversing a closing door (930 / 950 panel)

Pull Rope (930 / 950 panel)

Photocells (930 / 950 panel)

Remote control (930 / 950 panel)

Magnetic Loop (950 panel)

Radar (950 panel)

Traffic lights (950 panel)

Warning lights (950 panel)

Reduced opening (950 panel)

Airlock (950 panel)

FINISHES:

Internal (Standard Ral 9002 - off white)

Other (specify Ral / BS colour)

External (Standard polyester options)

Ral 3002 - Red Ral 1021 - Yellow

Ral 5010 - Blue Ral 7016 - Grey

Ral 9010 - White Ral 9006 - Silver

Ral 9002 - Off white Ral 9007 - Grey

Ral 6005 - Green

Other (specify Ral / BS colour)

WINDOWS:

Panel (P) Option: Frame (F) Option:

DARP Solid Bottom Panel

DAOP Double Glazed

Single glazed Single glazed

Sections: Glass

PASSDOOR: (Viewed from inside)

Left hand hung Right hand hung

On left In Center On right

LOCKING:

Lockbolt Cylinder Lock

NOTES:

DRAWN BY:

CHECKED BY:

DATE:

DRAWING No. REV.